


PD07 Series

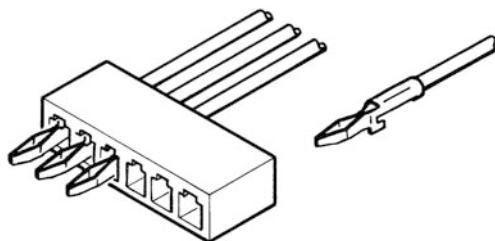



特 長 FEATURES

- 2.0mmピッチで高さ4.5mm、幅2.8mmとロータイプの基板直付型。
- 端子は適度な基板挿入力を有し基板挿入不良が少ない独自の形状。
- ハウジングと端子の固着は当社独自の構造。
- ハウジングに極性付。
- Direct board mounting type with a 2.0mm pitch and a low profile of 4.5mm in height and 2.8mm in width.
- Uniquely formed terminals exhibit an appropriate board mating force and minimize mismatings.
- A unique, original structure of our own design has been employed for the fastening of terminals with the housing.
- Polarized housings.

材 質 MATERIALS


ハウジング Housing	66ナイロン (UL94V-0) 66Nylon (UL94V-0)
端 子 Terminal	黄銅／錫めっき Brass/Tin plating

基板レイアウト PCB LAYOUT

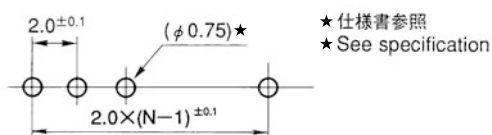組立
レイアウト
ASSEMBLY
LAYOUT

端 子 TERMINAL

品 番 Part No.	ワイヤレンジ Wire range	被覆外径 Ins. dia.	数量／リール Pcs/Reel	備 考 Remarks
507203-2M	AWG#24～#30	φ 1.5 max.	12,000×R	




507203

仕 様 SPECIFICATIONS

1	極 数 Poles	2～15P
2	ピ ッ チ Pitch	2.0mm
3	定 格 電 流 Rated Current	2A max.
4	耐 電 圧 Withstand Voltage	AC800V r.m.s.
5	接 触 抵 抗 Contact Resistance	10mΩ max.
6	絶 縁 抵 抗 Insulation Resistance	100MΩ min./DC500V
7	使用温度範囲 Temperature Range	－40℃～＋85℃
8	適用基板厚 PCB Thickness	1.6mm

ハウジング HOUSING

PD07A □□M

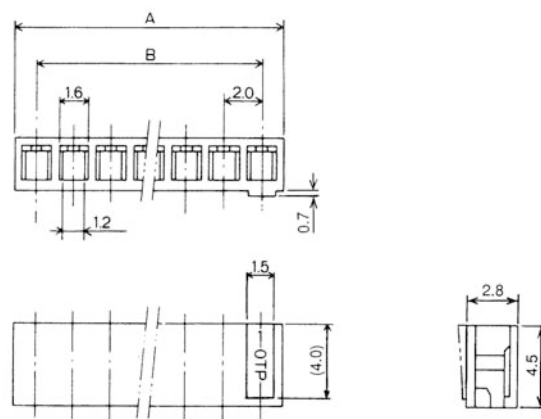

極数 Poles	注 文 Ordering No.	A	B	包装数量 Package Pcs	備 考 Remarks
02	PD07A02M	4.4	2.0	1,000	
03	PD07A03M	6.4	4.0	1,000	
04	PD07A04M	8.4	6.0	1,000	
05	PD07A05M	10.4	8.0	1,000	
06	PD07A06M	12.4	10.0	1,000	
07	PD07A07M	14.4	12.0	1,000	
08	PD07A08M	16.4	14.0	1,000	
09	PD07A09M	18.4	16.0	1,000	
10	PD07A10M	20.4	18.0	1,000	
11	PD07A11M	22.4	20.0	1,000	
12	PD07A12M	24.4	22.0	1,000	
13	PD07A13M	26.4	24.0	1,000	
14	PD07A14M	28.4	26.0	1,000	
15	PD07A15M	30.4	28.0	1,000	