


US UNSEALED SERIES

For DEVICE Type2

* For terminal selection, please contact our sales staff.

Housing (UNIT : mm)

9.5 1way



F (6098-6572)


Material PBT
Color Black



F cover (6911-5010)


Material PBT
Color Black

1.5 (20) 2.8 (8) 6.3 (4) 32way



F (6098-6461)

Material PBT
Color Black





F cover (6911-5636)


Material PBT
Color Black

2.8 8way Header

Material PBTG30
Color Black

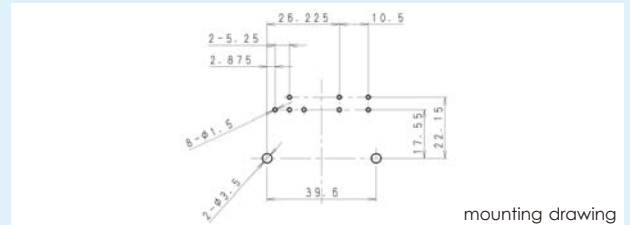


M (6098-6316) note)



Material PBT
Color Orange

F (6098-6412) note)




Material PBT
Color Brown

F (6098-6415) note)

US SEALED SERIES

Structure

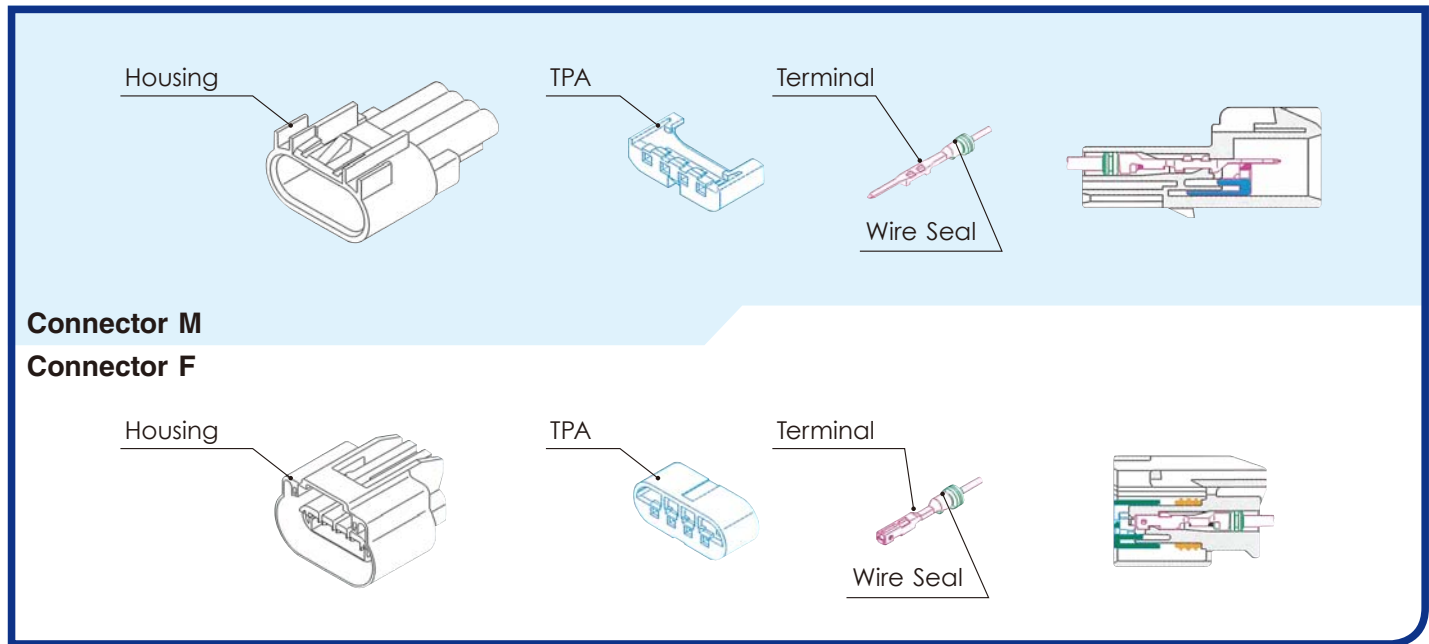

Features

特点

US sealed series comply with SAE/USCAR-2.

This series consists of 0.64mm, 1.5mm, 2.8mm and 9.5mm types classified according to terminal size, covering an extensive array of applications from signal to power circuits.

US防水系列达到了SAE/USCAR-2标准。

按照端子尺寸划分为0.64mm•1.5mm•2.8mm•9.5mm型,从信号回路到电源回路,能广泛应用。

- The connector mechanism only allows the TPA to be set when the terminal completely inserted.
- TPAs are pre-mounted on housings, and are structured to enable setting by the same simple operation regardless of the number of ways, improving operation.
- 具有当端子在半插入状态时,TPA无法组装到位的构造。
- TPA预先安装在接插件护套上,无论多少极数都能够通过简单的统一操作进行安装,可提高工作效率。