


10275



Wire to Wire 2.03mm ϕ connectors

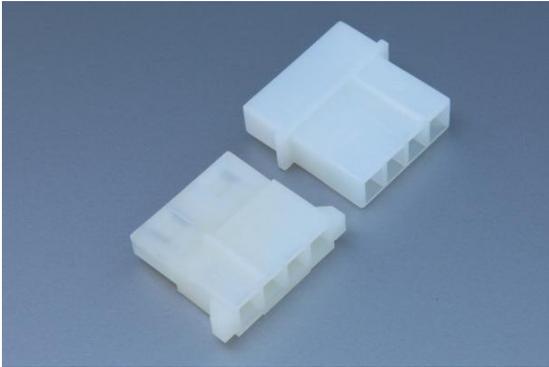

PERFORMANCE

Electrical Rating: AC/DC 250V 7A
 額定電壓電流
 Insulation Resistance: 1000M Ω min.
 絕緣阻抗
 Withstanding Voltage: 1000V AC/minute
 耐電壓
 Temperature Range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
 適用溫度



TERMINAL

Part No.: 10275BS-2

產品編號

Thickness: 0.25mm

銅板厚度

Material: Brass

材質 黃銅

Surface Treatment: Tin-plated

表面處理

鍍錫

Acceptable Wire: AWG# 16~22

適用電線

Insulation O.D.: 2.10~2.50mm

線皮外徑

Suitable Contact: 112751BS-2


配合端子

Suitable Housing: P102754

配合塑膠

Packing: 7,500PCS(Reel)

包裝數量

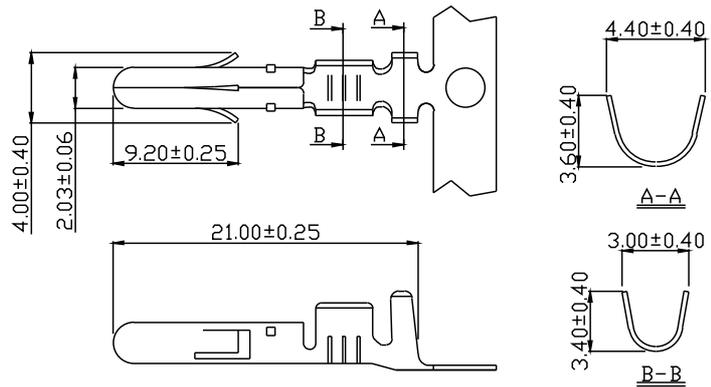

HOUSING

Part No.: P102754

產品編號

Material: Nylon 94V-2

材質

Suitable Contact: 10275BS-2

配合端子

Suitable Housing: P112754


配合公座

Acceptable Wire: AWG# 16~22

適用電線

Packing: 500PCS (Bag)

包裝數量

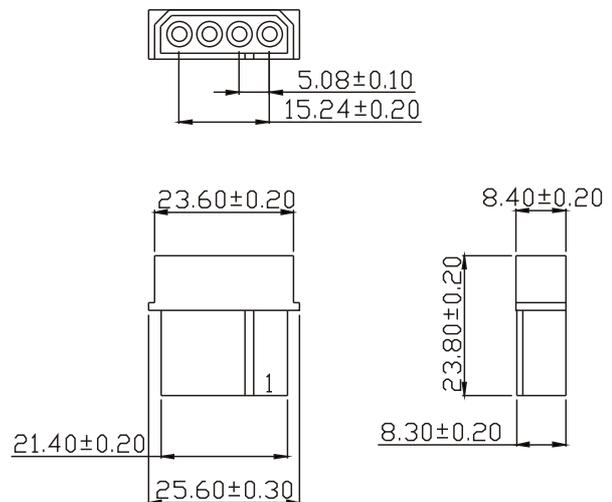

Behave in conformity with continual product development policy, SinSheng (STM) reserves the right of specification changing of contents described in this catalogue at any time and without prior notice. Please contact the sales department nearby for most updated information.
 由於產品持續開發的政策, 信盛(STM)保留隨時變更本目錄所述之規格且不需提前通知的權利, 請連繫業務處查詢最新的產品資訊。

11275 Wire to Wire 2.03mm ϕ connectors




TERMINAL

Part No.: 112751BS-2
 產品編號
 Thickness: 0.30mm
 銅板厚度
 Material: Brass
 材質 黃銅
 Surface Treatment: Tin-plated
 表面處理 鍍錫
 Acceptable Wire: AWG# 18~24
 適用電線
 Insulation O.D.: 1.50~2.10mm
 線皮外徑
 Suitable Contact: 10275BS-2
 配合端子
 Suitable Housing: P112754
 配合塑膠
 Packing: 7,500PCS(Reel)
 包裝數量

PERFORMANCE

Electrical Rating: AC/DC 250V 7A
 額定電壓電流
 Insulation Resistance: 1000M Ω min.
 絕緣阻抗
 Withstanding Voltage: 1000V AC/minute
 耐電壓
 Temperature Range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
 適用溫度

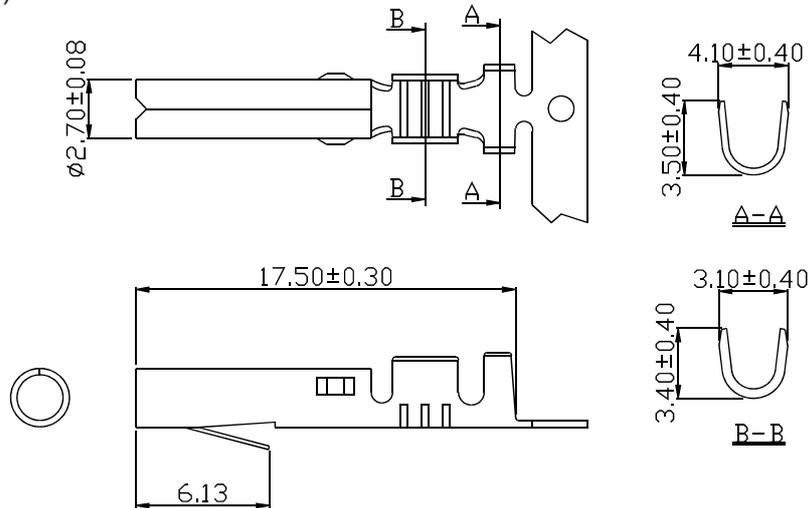

HOUSING

Part No.: P112754
 產品編號
 Material: Nylon 94V-2
 材質
 Suitable Contact: 112751BS-2
 配合端子
 Suitable Housing: P102754
 配合公座
 Acceptable Wire: AWG# 18~24
 適用電線
 Packing: 500PCS (Bag)
 包裝數量

