








Electrical Rating: AC/DC 250V 0.8~3A
額定電壓電流
Insulation Resistance: 1000MΩ min.
絕緣阻抗
Withstanding Voltage: 1500V AC/minute
耐電壓
Temperature Range: -40°C~+105°C
適用溫度

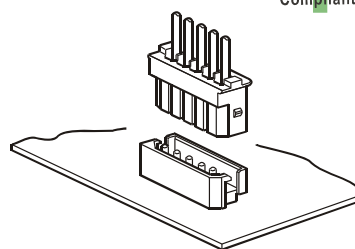

3.0mm

包裝數

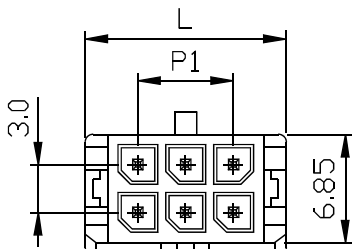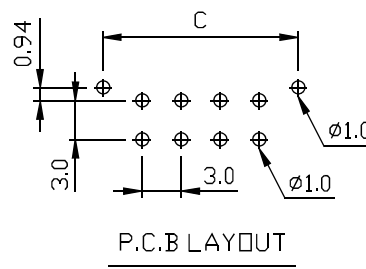

TOLERANCE	
X.	± 0.5
X.X	± 0.25
X.XX	± 0.2
X.XXX	± 0.08

Tolerance: ± 0.20 ± 0.15					Tolerance: ± 0.30 ± 0.25					Tolerance: ± 0.40 ± 0.35				
Part No.	POS.	L	P1	C	Part No.	POS.	L	P1	C	Part No.	POS.	L	P1	C
MDK11111P1	2x1	6.65	--	6.00	MDK11111P5	2x5	18.65	12.00	18.00	MDK11111P9	2x9	30.70	24.00	30.00
MDK11111P2	2x2	9.65	3.00	9.00	MDK11111P6	2x6	21.65	15.00	21.00	MDK11111P10	2x10	33.70	27.00	33.00
MDK11111P3	2x3	12.65	6.00	12.00	MDK11111P7	2x7	24.65	18.00	24.00	MDK11111P11	2x11	36.70	30.00	36.00
MDK11111P4	2x4	15.65	9.00	15.00	MDK11111P8	2x8	27.70	21.00	27.00	MDK11111P12	2x12	39.70	33.00	39.00

Behave in conformity with continual product development policy, SinSheng (STM) reserves the right of specification changing of contents described in this catalogue at any time and without prior notice. Please contact the sales department nearby for most updated information.
由於產品持續開發的政策，信盛(STM)保留隨時變更本目錄所述之規格且不需預先通知之權利。請聯繫業務處查詢最新的產品資訊。

