


24036



Pitch **0.4mm** FPC Connectors - SMT Type

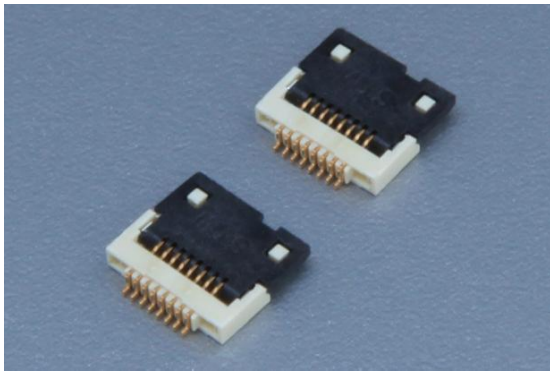

PERFORMANCE

Electrical Rating: AC/DC 40V 0.4A

額定電壓電流

Insulation Resistance: 500MΩ min.

絕緣阻抗

Withstanding Voltage: 120V AC/minute

耐電壓

Temperature Range: -55°C~+85°C

適用溫度

0.4mm



CONNECTOR

Part No.: **MSK24036P8**

產品編號

Material: Housing: LCP 94V-0

材質

塑膠座

Contact Pin: PB

接觸針

磷青銅

Applicable Wire: FPC: 0.2mm thick flat cable.

適用電線

Packing: 2,000PCS (REEL)

包裝數量

Please contact the sales representative
nearby for further information.
進一步資訊請就近連絡業務員!

| TOLERANCE | |
|-----------|-------|
| .0 | ±0.25 |
| .00 | ±0.15 |
| .000 | ±0.0 |

Behave in conformity with continual product development policy, SinSheng (STM) reserves the right of specification changing of contents described in this catalogue at any time and without prior notice. Please contact the sales department nearby for most updated information.
由於產品持續開發的政策, 信盛(STM)保留隨時變更本目錄所述之規格且不需提前通知的權利, 請連繫業務處查詢最新的產品資訊。