


# 2408



## Pitch 3.5mm Wire to Board Connectors - SMT Type

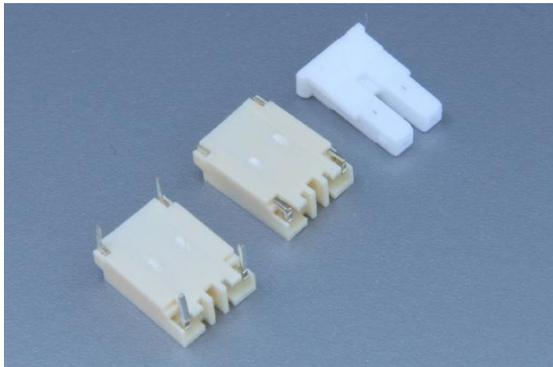

### PERFORMANCE

Electrical Rating: AC/DC 1400V 1A  
 額定電壓電流  
 Insulation Resistance: 1000MΩ min.  
 絕緣阻抗  
 Withstanding Voltage: 3800V AC/minute  
 耐電壓  
 Temperature Range: -25°C~+85°C  
 適用溫度



### CONNECTOR

Part No.: MS2408P2

產品編號

MS2408P2 RF:D (Lock Type)

Material: Housing: Nylon 94V-0

材質 塑膠座

Contact Pin: Brass, Tin-plated

接觸針 黃銅, 鍍錫

Suitable Contact: 2408PS-2

配合端子

Suitable Housing: P2408P2



配合塑膠

Applicable Wire: AWG# 24~28


適用電線

Packing: 1,000PCS (Reel)


包裝數量

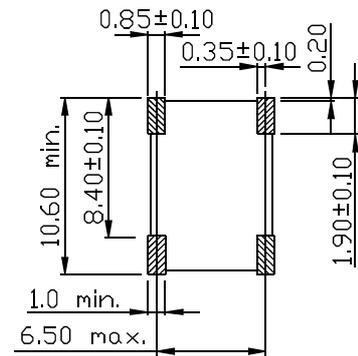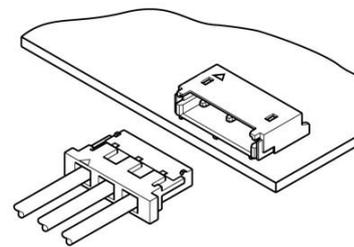



3.50mm

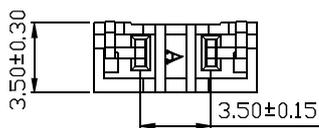

P/No. MS2408P2 RF:D  
 LOCK Type

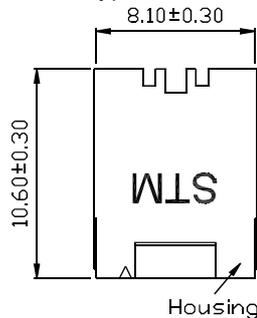

P/No. MS2408P2

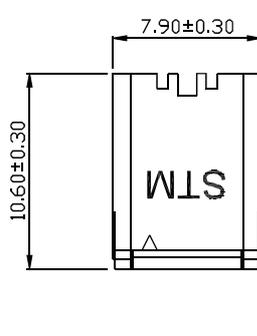

Behave in conformity with continual product development policy, SinSheng (STM) reserves the right of specification changing of contents described in this catalogue at any time and without prior notice. Please contact the sales department nearby for most updated information. 由於產品持續開發的政策, 信盛(STM)保留隨時變更本目錄所述之規格且不需提前通知的權利, 請連繫業務處查詢最新的產品資訊。

# 2408 Wire to Board Connectors



## CONNECTOR - Side Entry Type

Part No.: **M2408P2R**

產品編號

Material: Housing: Nylon 94V-0

材質

塑膠座

Contact Pin: Brass, Tin-plated

接觸針

黃銅

鍍錫

Suitable Contact: 2408PS-2

配合端子

Suitable Housing: P2408P2

配合塑膠

Applicable Wire: AWG# 24~28

適用電線

Packing: 600PCS (Reel)

包裝數量

## PERFORMANCE

Electrical Rating: AC/DC 1400V 1A

額定電壓電流

Insulation Resistance: 1000MΩ min.



絕緣阻抗

Withstanding Voltage: 3800V AC/minute





耐電壓

Temperature Range: -25°C ~ +85°C

適用溫度

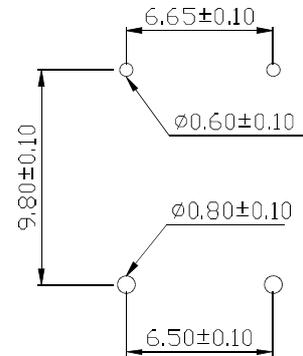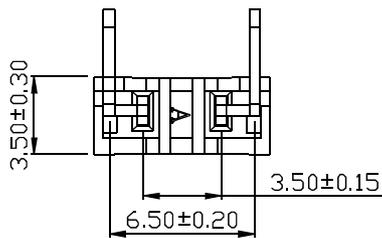

P.C.B. LAYOUT

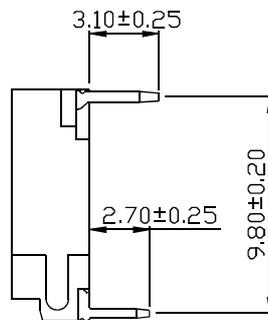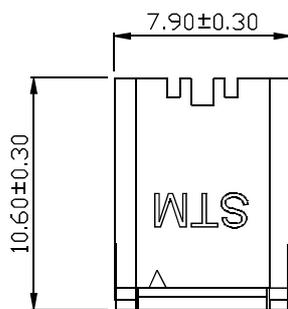

3.50mm

# 2408 Wire to Board Connectors



## HOUSING

Part No.: **P2408P2**

產品編號

Material: Nylon 94V-0

材質

Suitable Contact: 2408PS-2

配合端子

Suitable Connector: M2408P2R MS2408P2

配合公座

Applicable Wire: AWG# 24~28

適用電線

Packing: 1,000PCS (Bag)

包裝數量

## PERFORMANCE

Electrical Rating: AC/DC 1400V 1A

額定電壓電流

Insulation Resistance: 1000MΩ min.




絕緣阻抗

Withstanding Voltage: 3800V AC/minute

耐電壓

Temperature Range: -25°C~+85°C

適用溫度

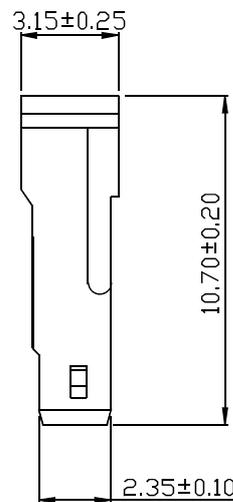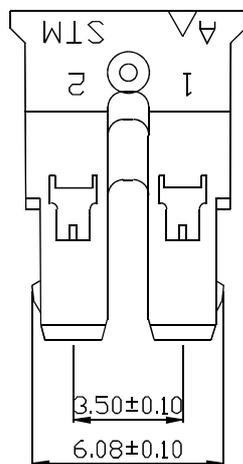

3.50mm

# 2408 Wire to Board Connectors



## TERMINAL

Part No.: 2408-PS2

產品編號

Thickness: 0.20mm

厚度

Material: Phosphor Bronze (PS)

材質

Suitable Treatment: Tin-plated

表面處理

Applicable Wire: AWG#24~28

適用電線

Insulation O.D.: 0.90~1.70mm

線皮外徑

Suitable Housing: P2408P2

配合塑膠

Suitable Connector: M2408P2R MS2408P2

配合公座

Packing: 5,000PCS (Reel)

包裝數量

## PERFORMANCE

Electrical Rating: AC/DC 1400V 1A

額定電壓電流

Insulation Resistance: 1000MΩ min.

絕緣阻抗

Withstanding Voltage: 3800V AC/minute

耐電壓

Temperature Range: -25°C~+85°C

適用溫度



3.50mm

