24211

Pitch *4.0mm* Wire to Board Connectors - SMT Type

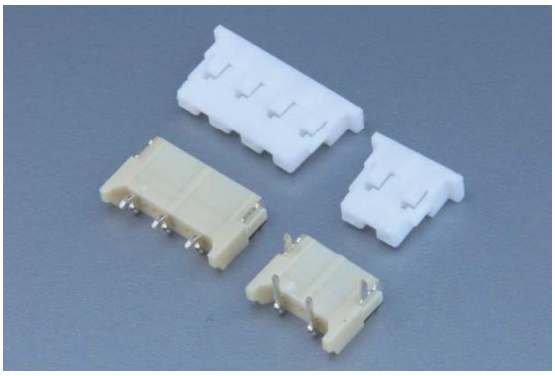

PERFORMANCE

Electrical Rating: AC/DC 600V 1A
額定電壓電流
Insulation Resistance: 1000MΩ min.
絕緣阻抗
Withstanding Voltage: 1800V AC/minute
耐電壓
Temperature Range: -25℃~+85℃
適用溫度

REACH
RoHS Compliant

CONNECTOR - Side Entry

Part No.: **MS24211P3~MS24211P9**
產品編號

RF: A RF: B RF: C RF: D

Material: Housing: Nylon 94V-0
材質 塑膠座
Contact Pin: Brass, Tin-plated
接觸針 磷青銅, 鍍錫
Suitable Contact: 24211PS-2
配合端子
Suitable Housing: P24211P3~P24211P9
配合塑膠
Acceptable Wire: AWG#22~28
適用電線

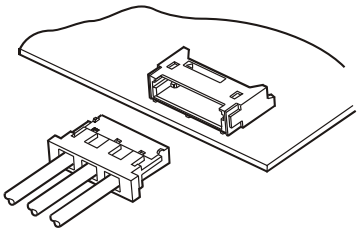

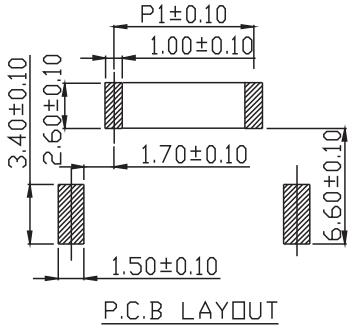



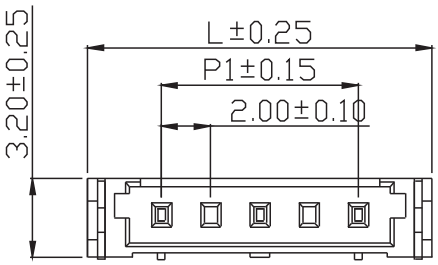



4.0mm

Packed in Reel Unit:mm

Part No.	RF.	POS.	With Pins	L	P1	Pack
MS24211P3	.	3	1;3	10.00	4.00	1500
MS24211P5	.	5	1;3;5	14.00	8.00	1500
MS24211P7	.	7	1;3;5;7	18.00	12.00	1500
MS24211P9	.	9	1;3;5;7;9	22.00	16.00	1500
MS24211P5	B	5	1;5	14.00	8.00	1500
MS24211P7	B	7	1;7	18.00	12.00	1500
MS24211P9	B	9	1;3;7;9	22.00	16.00	1500
MS24211P7	D	7	1;3;7	18.00	12.00	1500

Packed in Box Unit:mm

Part No.	RF.	POS.	With Pins	L	P1	Pack
MS24211P3	A	3	1;3	10.00	4.00	600
MS24211P5	A	5	1;3;5	14.00	8.00	500
MS24211P7	A	7	1;3;5;7	18.00	12.00	400
MS24211P9	A	9	1;3;5;7;9	22.00	16.00	400
MS24211P5	C	5	1;5	14.00	8.00	500
MS24211P7	C	7	1;7	18.00	12.00	400

Behave in conformity with continualproduct development policy, SinSheng (STM) reserves the rightof specification changing of contentsdescribed in this catalogue atany time and without priornotice. Please contact the salesdepartment nearby for most updatedinformation.
由於產品持續開發的政策,信炤(STM)保留隨時變更本目錄所述之規格且不需提前通知的權利.請連繫業務處查詢最新的產品資訊.

Embossed carrier tape dimensional drawing
MS24211 Series

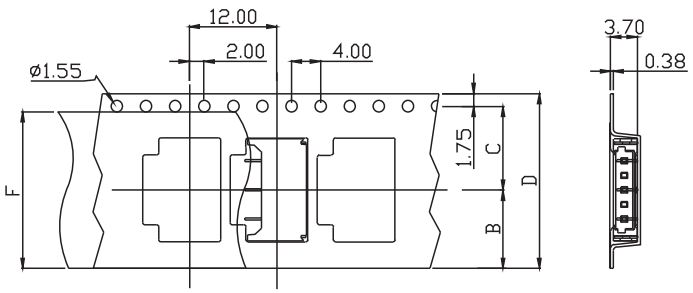

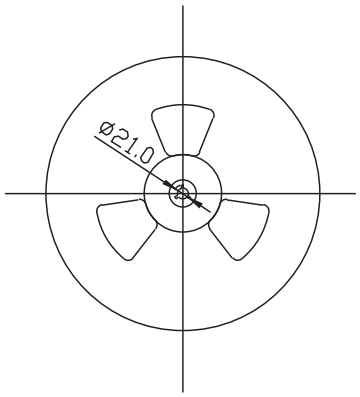

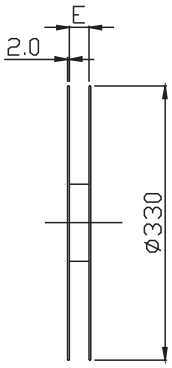

4.0mm

Unit: mm

POS.	B	C	D	E	F
3	6.75	7.50	16.00	17.50	13.50
5	10.75	11.50	24.00	25.50	21.50
7	10.75	11.50	44.40	25.50	21.50

CONNECTOR - Side Entry

Part No.: **M24211P3R~M24211P9R**
產品編號

Material: Housing: Nylon 94V-0
材質 塑膠座

Contact Pin: P.B, Tin-plated
接觸針 磷青銅, 鍍錫

Reinforcement: P.B, Tin-plated
補強片 磷青銅, 鍍錫

Suitable Contact: 24211PS-2
配合端子

Suitable Housing: P24211P3~P24211P9
配合塑膠

Acceptable Wire: AWG#22~28
適用電線

Square Contact Pin: : 0.55±0.05mm
方型

PERFORMANCE

Electrical Rating: AC/DC 600V 1A
額定電壓電流

Insulation Resistance: 1000MΩ min.
絕緣阻抗

Withstanding Voltage: 1800V AC/minute
耐電壓

Temperature Range: -25℃~+85℃
適用溫度

Halogen Free
REACH
RoHS Compliant



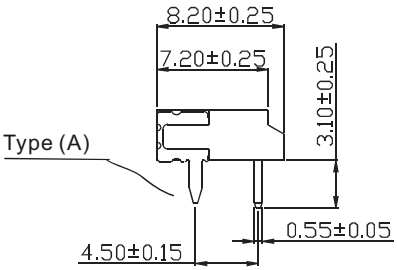





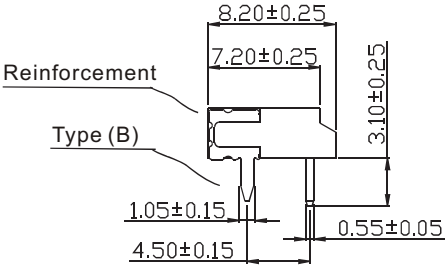

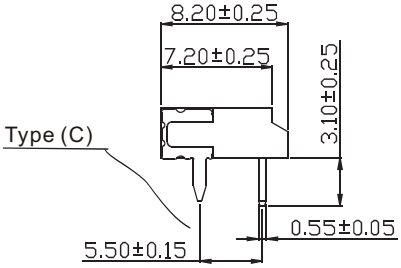

4.0mm

Type (A) : Unit: mm

Part No.	RF.	POS	With Pins	L	P1	Pack
M24211P3R	.	3	1;3	10.00	4.00	600
M24211P5R	.	5	1;3;5	14.00	8.00	500
M24211P7R	.	7	1;3;5;7	18.00	12.00	400
M24211P9R	.	9	1;3;5;7;9	22.00	16.00	300
M24211P5R	A	5	1;5	14.00	8.00	600
M24211P7R	A	7	1;7	18.00	12.00	500
M24211P7R	D	7	1;3;7	18.00	12.00	400
M24211P3R	F	3	1;3	10.00	4.00	600
M24211P5R	F	5	1;3;5	14.00	8.00	500
M24211P7R	F	7	1;7	18.00	12.00	400

Type (B) : Unit: mm

Part No.	RF.	POS	With Pins	L	P1	Pack
M24211P3R	A	3	1;3	10.00	4.00	600
M24211P9R	A	9	1;3;7;9	22.00	16.00	300
M24211P5R	B	5	1;3;5	14.00	8.00	500
M24211P7R	B	7	1;3;5;7	18.00	12.00	400
M24211P5R	C	5	1;5	14.00	8.00	500
M24211P7R	C	7	1;7	18.00	12.00	400
M24211P7R	E	7	1;3;7	18.00	12.00	400
M24211P3R	G	3	1;3	10.00	4.00	600
M24211P5R	G	5	1;3;5	14.00	8.00	500
M24211P7R	G	7	1;7	18.00	12.00	400

Type (C) : Unit: mm

Part No.	RF.	POS	With Pins	L	P1	Pack
M24211P5R	D	5	1;5	14.00	8.00	500

HOUSING

Part No.: **P24211P3~P24211P7**
產品編號
Material: Nylon 94V-0
材質
Suitable Contact: 24211PS-2
配合端子
Suitable Connector: M24211P3R~M24211P7R
配合公座
MS24211P3~MS24211P7

Acceptable Wire: AWG#22~28
適用電線

PERFORMANCE

Electrical Rating: AC/DC 600V 1A
額定電壓電流
Insulation Resistance: 1000MΩ min.
絕緣阻抗
Withstanding Voltage: 1800V AC/minute
耐電壓
Temperature Range: -25℃~+85℃
適用溫度

Halogen Free
REACH
RoHS Compliant

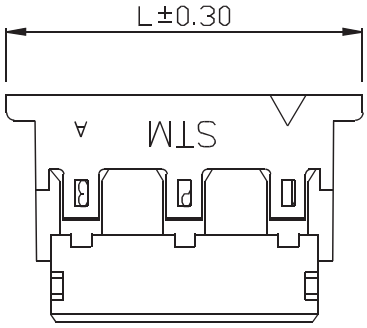

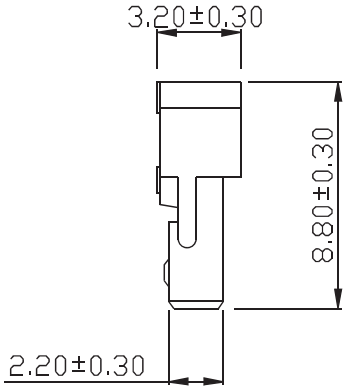

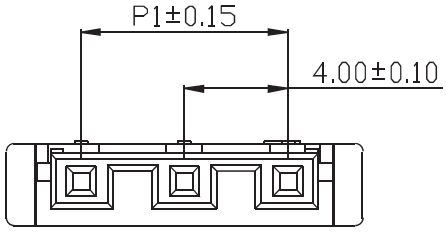

Unit: mm

PartNo.	POS.	L	P1	Pack.
P24211P3	3	9.80	4.00	1000
P24211P5	5	13.80	8.00	1000
P24211P7	7	17.80	12.00	500

4.0mm

TERMINAL

Part No.: **24211PS-2**
產品編號
Thickness: 0.20mm
銅板厚度
Material: Phosphor Bronze
材質 磷青銅
Surface Treatment: Tin-plated
表面處理 鍍錫
Acceptable Wire: AWG#22-28
適用電線
Insulation O.D.: 1.60~2.40mm
線皮外徑
Suitable Housing: P24211P3~P24211P7
配合塑膠
Suitable Connector: M24211P3R~M24211P7R
配合公座
MS24211P3~MS24211P7
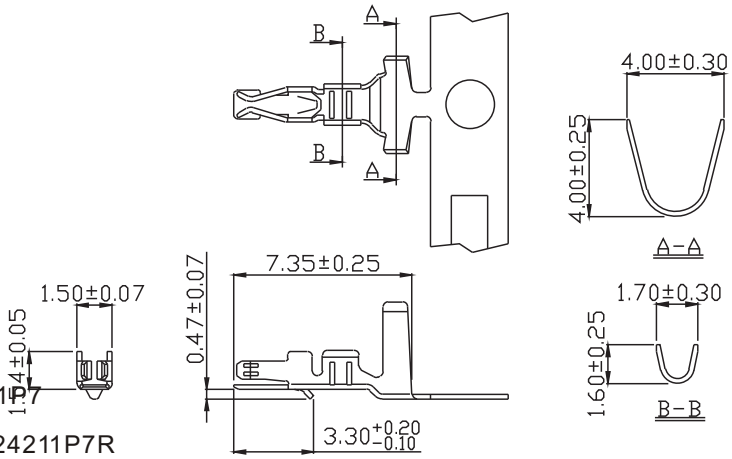
Packing: 5,000PCS(Reel)
包裝數量